


LED Track linear Light LLo101

LOW-CARBON

Drawings:

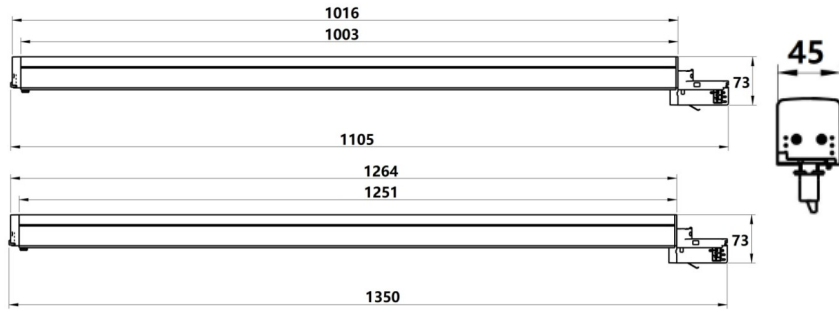

Model	Watt	Lumen	LED Qty	Length	PF
LLo101	10W	1250lm	72pcs	400mm	0.95
LLo101	40W	5200lm	252pcs	1105mm	0.95
LLo101	40W	5200lm	406pcs	1350mm	0.95
LLo101	50W	6000lm	406pcs	1350mm	0.95
LLo101	60W	6600lm	406pcs	1350mm	0.95




Features:

- High lumen output, 125-135lm/W whole lamp,
- Color temperature: 3000K, 4000K, 5000K,
- Direct connect to a AC200-240V (50~60Hz) supply,
- Customized length and watts,
- Lifetime : L80/B80 up to 50,000 hrs
- Install mixture with track light and emergency sign light etc

- Driver: BOKE/philips
- LED: Epistar Chip and PLCC package, Ra80
- Dimmable: DALI/TRAIC/0-10V
- 5 years warranty

Light distribution curves

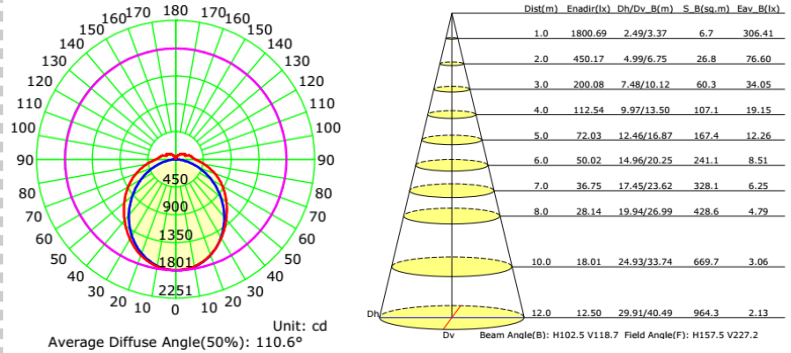

Application:

- Super market Lighting
- office Lighting
- Commercial Lighting
- Library Lighting
- Showroom Lighting

LOW-CARBON LIGHTING
 WEB: WWW.LOWCARBONLUX.COM
 MAIL: SALES@LOWCARBON-LED.COM