



Drawings:



LL1601







LL1602

Model	Watt	Lumen	LED Qty	Length	Beam angle
LL1601	30W	2000lm	12pcs	405mm	10,24,36,48,10x35°
LL1601	40W	2600lm	18pcs	565mm	10,24,36,48,10x35°
LL1601	60W	4000lm	24pcs	724mm	10,24,36,48,10x35°
LL1602	2x30W	2x2000lm	24pcs	405mm	10,24,36,48,10x35°
LL1602	2x40W	2x2600lm	36pcs	565mm	10,24,36,48,10x35°
LL1602	2x60W	2x4000lm	48pcs	724mm	10,24,36,48,10x35°



Light distribution curves

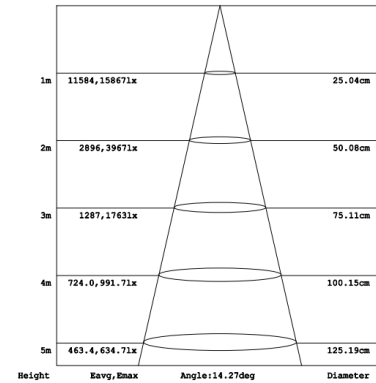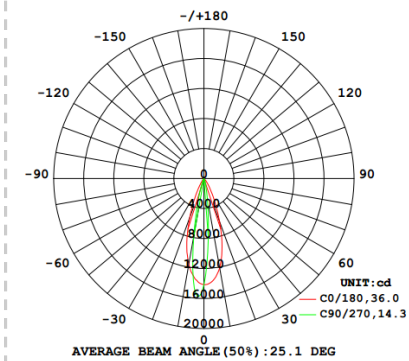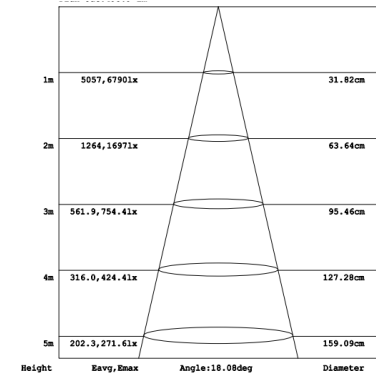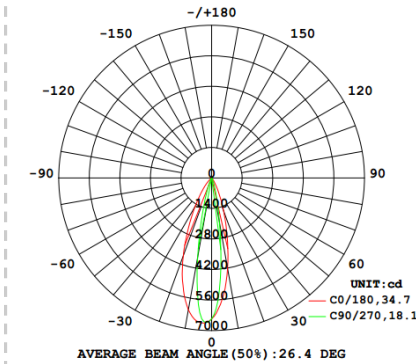

Features:

- UGR<9
- Color temperature: 3000K,4000K,5000K,
- Direct connect to a AC200-240V (50~60Hz) supply,
- Customized length and watts,
- Lifetime :L80/B80 up to 50,000 hrs
- Install mixture with track light and emergency sign light etc
- Driver:Tridonic driver
- LED:Osram 3030 SMD Chip,Ra80
- 5 years warranty

Application:

- Super market Lighting
- office Lighting
- Commercial Lighting
- Library Lighting
- Showroom Lighting

LOW-CARBON LIGHTING
 WEB:WWW.LOWCARBONLUX.COM
 MAIL:SALES@LOWCARBON-LED.COM