


LED Pendant light PDo102

LOW-CARBON LIGHTING

Drawings:

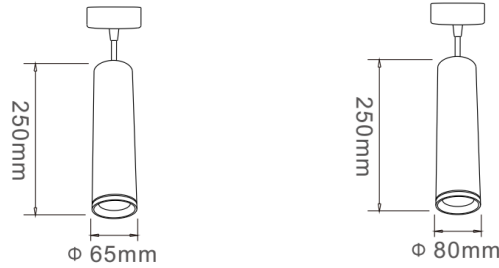

Model	Watt	Lumen	COB	Beam angle	PF
PDo101	10W	800lm	CREE	15 24 38 60°	0.9
PDo101	20W	1700lm	CREE	15 24 38°	0.9

Features:

- Aluminum 6063 heat sink
- Color temperature: 3000K, 4000K, 5000K,
- Direct connect to a AC200-240V (50~60Hz) supply
- Type of protection: IP20 (room side)
- Lifetime :L80/B80 up to 50,000 hrs
- Surface mount type and Track type,

- Driver:BOKE
- LED:CREE,Ra80/90
- 5 years warranty

LOW-CARBON LIGHTING
 WEB:WWW.LOWCARBONLUX.COM
 MAIL:SALES@LOWCARBON-LED.COM



Light distribution curves

