


Drawings:

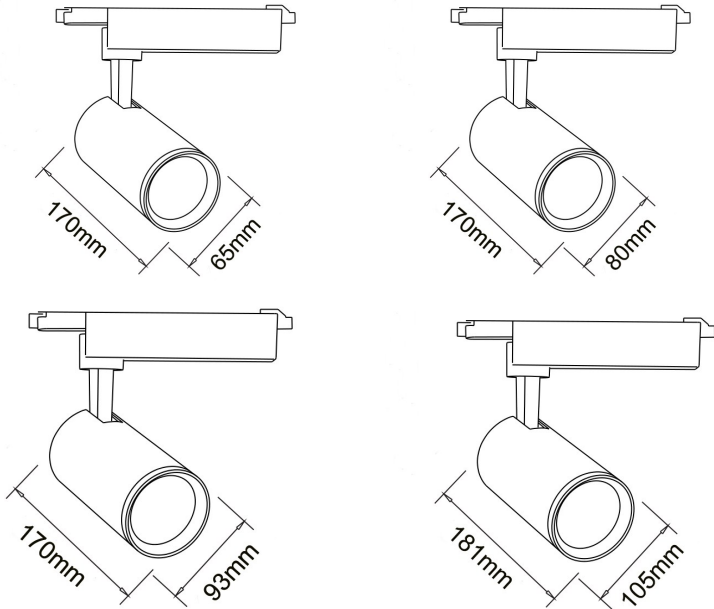

Model	Watt	Lumen	COB	Beam angle	PF
TR0201	10W	900lm	CREE	15 24 38 60°	0.9
TR0201	20W	1800lm	CREE	15 24 38°	0.9
TR0201	30W	2880lm	CREE	15 24 38 55°	0.9
TR0201	50W	4500lm	CREE	15 24 38°	0.9

- Driver: BOKE/philips
- LED: CREE/NICHIA; Ra80/90
- Dimmable: DALI/TRAIC/0-10V
- Special color options: meat/seafood/bread/fruit&vegetables

Features:

- High Lumen output, 95lm/W whole lamp
- Color temperature: 3000K, 4000K, 5000K,
- Direct connect to a AC200-240V (50~60Hz) supply
- Type of protection: IP20 (room side)
- Lifetime : L80/B80 up to 50,000 hrs

Light distribution curves

