
LOW-CARBON LIGHTING

Drawings:

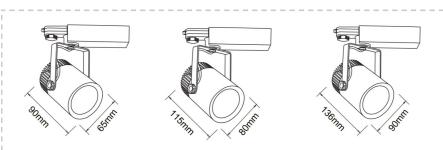

Model	Watt	Lumen	СОВ	Bean angle	PF
TRo5	10W	900lm	CREE	24° 38°	0.95
TRo5	20W	1800lm	CREE	24° 38°	0.95
TRo5	32W	2880lm	CREE	24° 38° 50°	0.95

Features:

- Driver:BOKE
- LED:CREE COB
- High Lumen output,95lm/W whole lamp
- ·Color temperature: 3000K,4000K,5000K,
- •Direct connect to a AC200-240V (50~60Hz) supply
- ¦-Type of protection: IP20 (room side) ¦-Lifetime: L80/B80 up to 50,000 hrs

Application:

- :Super market Lighting
- office Lighting
- ·Commercial Lighting
- Library Lighting
- ·Showroom Lighting







Light distribution curves

