


Drawings:

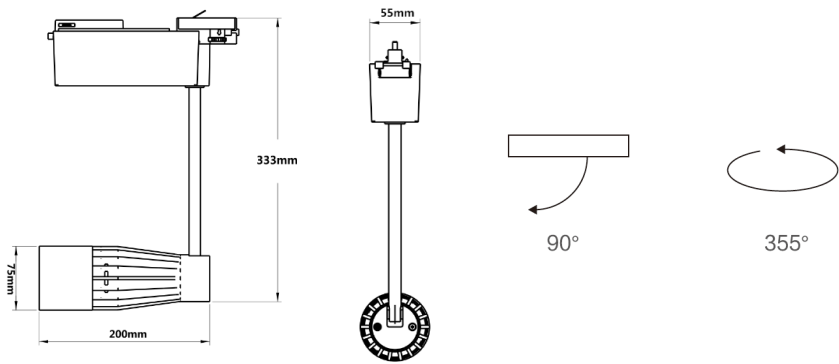

Model	Watt	Lumen	COB	Beam angle	PF
TR0506	30W	3000lm	Lumileds	15° 28° 38°	0.9
TR0506	40W	3500lm	Lumileds	15° 28° 38°	0.9

Features:

- Slim lamp with High lumen output, professional lighting distribution;
- Color temperature: 3000K, 4000K, 5000K,
- Direct connect to AC220-240V (50~60Hz) supply
- Type of protection: IP20 (room side)
- Lifetime: L70 up to 50,000 hrs
- 40W with efficient copper heat pipe
- Driver: BOKE/Philips/Tridonic
- LED: Lumileds; Ra80/90+
- Dimmable: DALI/TRIAC/0-10V
- 5 years warranty






LOW-CARBON LIGHTING

WEB: www.lowcarbonlux.com

MAIL: sales@lowcarbon-led.com



Light distribution curves

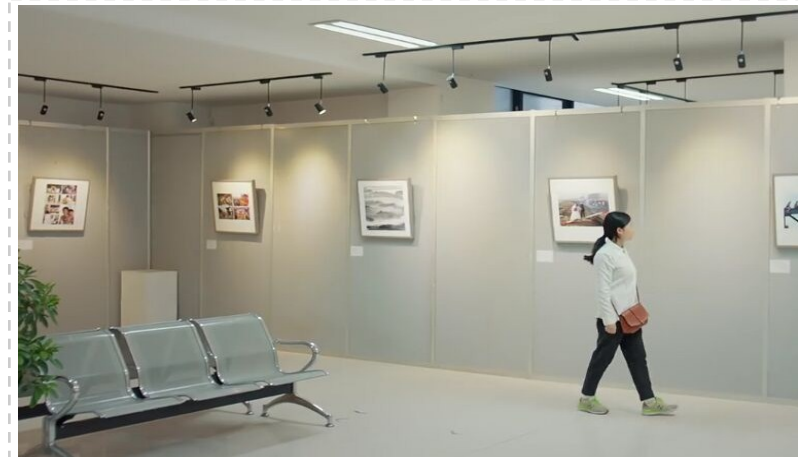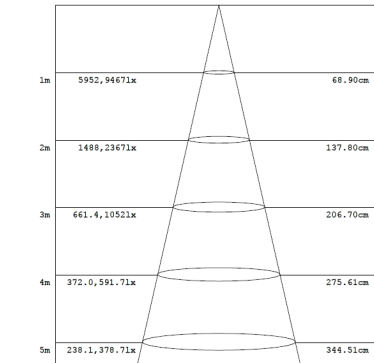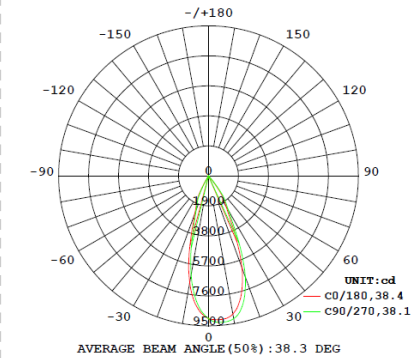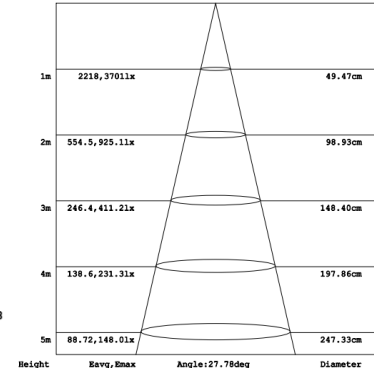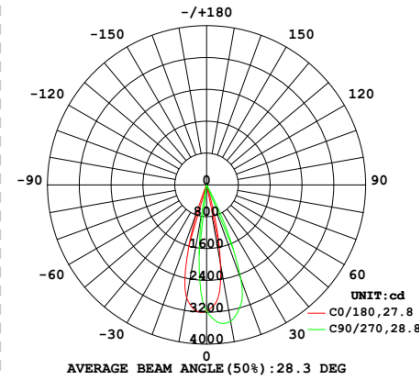

LED Retail Lighting Solution